


Flenskoppling - PN160 / Serie 2

Type: FA / FK -2

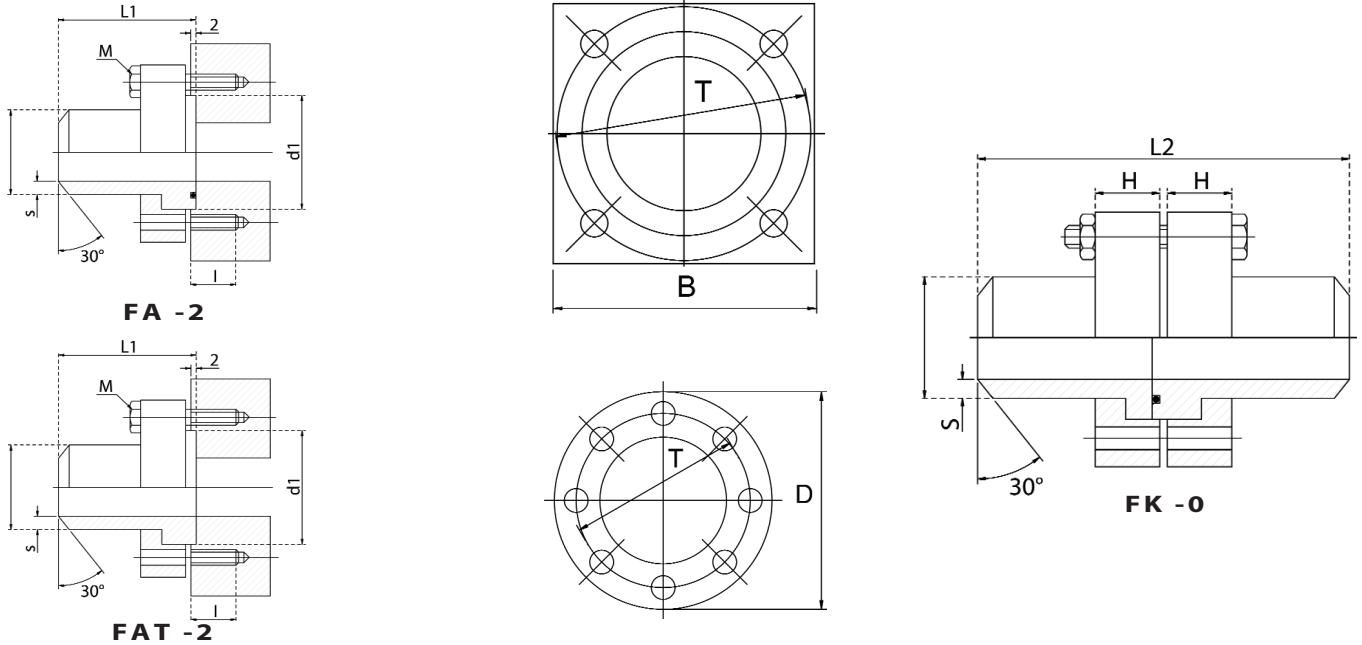

Type: FA -2

DN	B mm	D mm	T mm	d1 mm	L1 mm	L2 mm	H mm	i mm	da mm	s mm	Bouten	O-ring	Referentie
1.1/4"	80	-	72	55	64	122	24	20	38,0	4,0	M12 x 40	34,5 x 2,65	FA2032072
1.1/2"	90	-	80	60	68	130	29	24	48,3	4,0	M16 x 50	46,2 x 3,53	FA2038080
2"	100	-	98	76	80	153	38	24	60,3	5,0	M16 x 60	53,0 x 5,33	FA2050098
2.1/2"	120	-	118	92	98	190	48	30	76,1	6,3	M20 x 70	69,0 x 5,33	FA2065118
3"	180	-	175	135	135	262	58	42	101,6	8,8	M30 x 90	92,5 x 5,33	FA2075175
4"	180	-	175	135	135	262	58	35	114,3	3,6	M30 x 90	106,0 x 5,3	FA2100175
5"	-	245	200	168	150	292	68	32	152,4	12,5	M24 x 100	132,0 x 7,0	FA2125200
6"	-	300	245	205	190	372	78	32	177,8	16,8	M30 x 110	157,5 x 7,0	FA2150245

Referentie rvs uitvoering: R + Ref.

Type: FK -2

DN	B mm	D mm	T mm	d1 mm	L1 mm	L2 mm	H mm	i mm	da mm	s mm	Bouten	O-ring	Referentie
1.1/4"	80	-	72	55	64	122	24	20	38,0	5,0	M12 x 70	34,5 x 2,65	FK2032072
1.1/2"	90	-	80	60	68	130	29	24	48,3	5,0	M16 x 80	46,2 x 3,53	FK2038080
2"	100	-	98	76	80	153	38	24	60,3	6,3	M16 x 100	53,0 x 5,33	FK2050098
2.1/2"	120	-	118	92	98	190	48	30	76,1	7,1	M20 x 120	69,0 x 5,33	FK2065118
3"	180	-	175	135	135	262	58	42	101,6	10,0	M30 x 150	92,5 x 5,33	FK2075175
4"	180	-	175	135	135	262	58	35	114,3	11,0	M30 x 150	106,0 x 5,3	FK2100175
5"	-	245	200	168	150	292	68	32	152,4	16,0	M24 x 170	132,0 x 7,0	FK2125200
6"	-	300	245	205	190	372	78	32	177,8	17,5	M30 x 200	157,5 x 7,0	FK2150245

Referentie rvs uitvoering: R + Ref.